


PRODUCT DATA SHEET

PRODUCT: EASTTO SS ROLLING OIL 35

GRADE: VG 32

INTRODUCTION: EASTTO SS ROLLING OIL 35 is compounded and non-staining rolling oil. It is blended from high quality base stocks and selected additive package. This product has been specially developed for cold rolling of Carbon Steel and Stainless steel Strips.

APPLICATION: EASTTO SS ROLLING OIL 35 is recommended for cold rolling of Carbon Steel and Stainless steel strip. This oil can also be used in metal forming applications where mild load is encountered and as a bearing lubricant in multi roller mills.

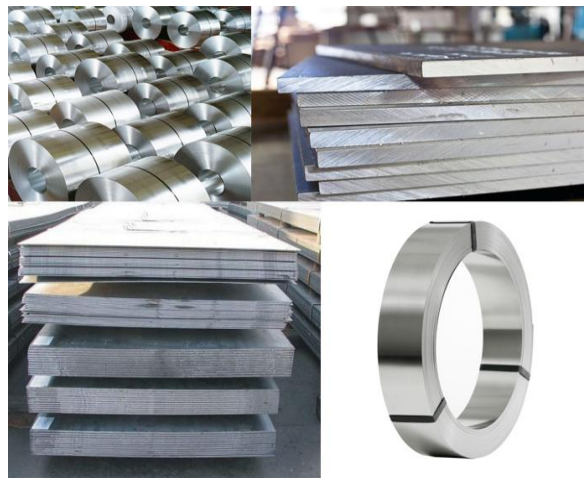

PERFORMANCE LEVEL: PROPRIETARY GRADE

TYPICAL PROPERTIES

CHARACTERISTICS	EASTTO SS ROLLING OIL 35
Kinematic Viscosity at 40°C, cSt	33
Flash Point, COC, °C, Min.	160
Sap Vaalue, mg KOH / gm	10.0
Copper Strip Corrosion Test at 100°C for 3 hours, Max.	1

PACKING: 210 Litres Drums

Date of issue : 10.11.2014

Date of revision: 04.08.2016

These Characteristics are typical of current production while future production will confirm to **EASTERN PETROLEUM PVT. LTD.** Specification variation in these characteristics may occur.

