

Eastto Open Gear Compounds

GRADE: 100, 225, 475 & 735

INTRODUCTION:

EASTTO OPEN GEAR COMPOUNDS - 100, 225, 475 & 735, are bituminous lubricant containing EP and special tackiness additives to provide stringiness and excellent filmstrength to encounter high pressure developed from heavily loaded open gear. These compounds are having good load carrying capacity and rust preventing properties.

APPLICATION : EASTTO OPEN GEAR COMPOUNDS -100, 225, 475 & 735 are recommended for lubrication of open gears, wire ropes and chain drives and also for lubrication of Kiln Tyres operating at high temperatures in Cement Mills and Chemical Plants.

PERFORMANCE LEVEL: Proprietary

TYPICAL PROPERTIES:

EASTTO OPEN GEAR COMPOUNDS				
CHARACTERISTICS	100	225	475	735
Appearance	Viscous liquid	Viscous liquid	Viscous liquid	Viscous liquid
Colour	Black	Black	Black	Black
Kinematic Viscosity at 100°C, cSt	90 to 120	210 to 250	400 to 500	900 to 1000
Flash Point, COC,°C, Min.	260	260	280	280

PACKING : 210 Litres Drum



Eastern Petroleum Private Limited


Regd. Off.:

Unit No. 1, Riddhi Siddhi, Corporate Park, V. N. Purav Marg,
(Sion Trombay Road), Chembur, Mumbai - 400 071. MH, India.
Tel.: +91 - 22 - 4232 4121, +91 - 22 - 2529 9990
Email: office@easternpetroleum.in, office@eastto.in,
Web: www.easternpetroleum.in, www.eastto.in



Eastern Petroleum Private Limited

an ISO 9001-2008 certified company

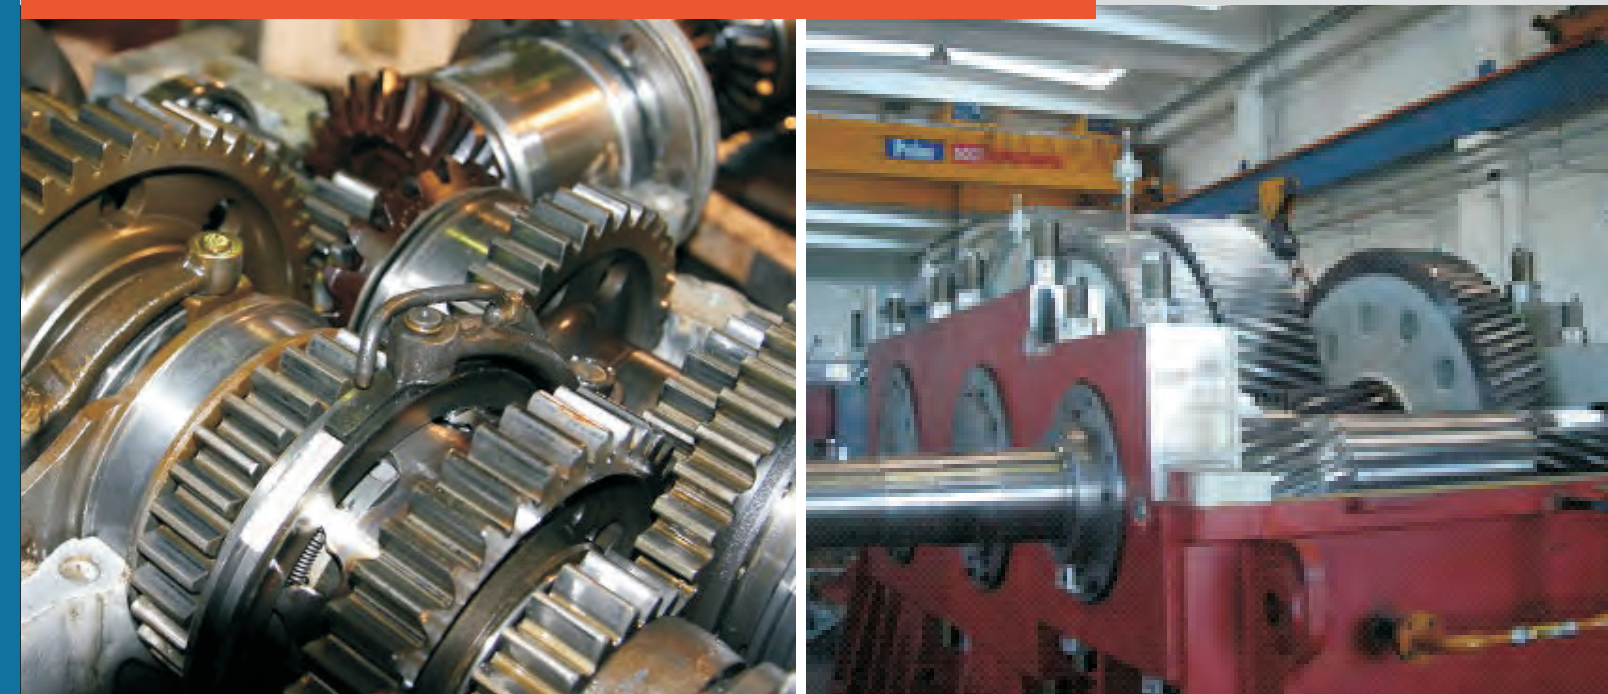

Eastto Open Gear Compounds