Eastto Ban DWX 132

INTRODUCTION: EASTTO BAN DWX 132 is high quality rust preventive which forms soft greasy and powerful protective film on the evaporation of the solvent. This rust preventive has very good water displacement characteristics.


APPLICATION: EASTTO BAN DWX 132 can be applied by immersion, brush, swab or spray for protecting metal sheets, steel wire, ball and roller bearings, nails, automotive spare parts, nut bolts, gear box parts, pistons, circular saws etc. from corrosion and rust.

PERFORMANCE LEVEL: EASTTO BAN DWX 132 is a proprietary product.

TYPICAL PROPERTIES

CHARACTERISTICS	EASTTO BAN DWX 132
Appearance	Clear to Hazy Brown Liquid
Film Thickness, Micron, Min.	4
Flash Point, PMCC,°C., Min.	40
Copper Strip Corrosion Test at 100°C for 3 Hrs.	1

PACKING: 210 Litres Drums









Eastern Petroleum Private Limited


Pord Off

Unit No. 1, Riddhi Siddhi, Corporate Park, V. N. Purav Marg, (Sion Trombay Road), Chembur, Mumbai - 400 071. MH, India. Tel.: +91 - 22 - 4232 4121, +91 - 22 - 2529 9990 Email: office@easternpetroleum.in, office@eastto.in, Web: www.easternpetroleum.in, www.eastto.in





an ISO 9001-2008 certified company

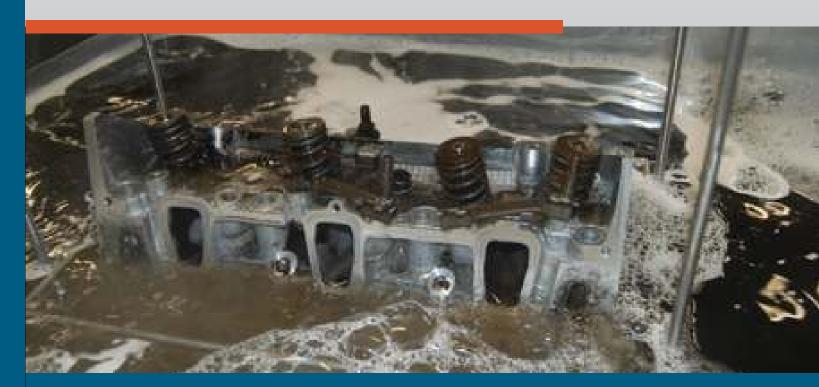

EasttoBan DWX 132