


Product Data Sheet

BRAND: EASTTO INDUSTRIAL GEAR OILS

GRADES: VG 68, 100, 150, 220, 320, 460 & 680

INTRODUCTION: These Oils are blended from highly refined Base Stocks and are fortified with specially selected EP and other Additives. They have good thermal stability and high oxidation resistance, good demulsibility, low foaming tendency and provide rust & corrosion protection to metal surfaces.

APPLICATION: These Oils are recommended for heavy duty enclosed gear drives, with splash and circulation systems and for plain bearings, sliding surfaces & chain drives subjected to heavy shock loads where temperatures do not exceed 100°C.

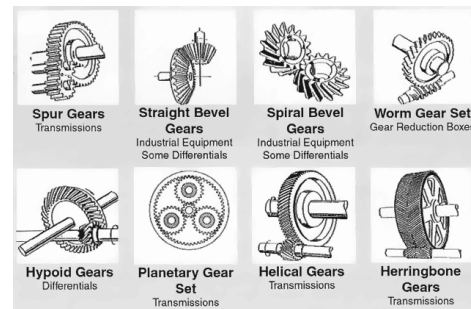

These Oils are recommended for heavy duty gear drives, circulation systems and for plain bearings, etc..

PERFORMANCE LEVEL: Meets IS: 8406 – 1993 (RA 2006) requirements.

TYPICAL PROPERTIES:

EASTTO INDUSTRIAL GEAR OILS							
CHARACTERISTICS	68	100	150	220	320	460	680
Kinematic Viscosity @ 40°C., cSt.	66 - 70	95 - 105	145 – 155	210 - 230	310 - 330	450 - 470	640 - 700
Viscosity Index, Min.	90	90	90	90	90	90	90
Flash Point, °C (COC), Min.	200	210	210	220	220	220	220
Pour Point, °C, Max.	-6	-6	-6	-6	-6	-6	-6

PACKING: 210 Litres Drums

Date of issue: 14.09.2014

PDS No. 03.21.01 – 03.21.07

PDS No. 01.31.02 / 01.31.04 These are typical figures and do not constitute a specification. In pursuit of continuous improvement, these figures may be changed without notice at the sole discretion of EASTERN PETROLEUM PVT. LTD.

